

# Adaptive Visualization of Gas Distribution Using Augmented Reality Glasses

Liyuan Duan, Haruka Matsukura, Parinya Punpongsanon, Takefumi Hiraki, Daisuke Iwai, and Kosuke Sato  
Graduate School of Engineering Science, Osaka University, Toyonaka, Osaka, Japan  
{liyuan, hiraki}@sens.sys.es.osaka-u.ac.jp, {haruka.matsu, parinya, daisuke.iwai, sato}@sys.es.osaka-u.ac.jp

**Abstract**—Monitoring gas distribution is a method to supervise and validate the stabilization and safety of landfill sites. Recent technologies that use sophisticated sensors confuse workers’ understanding of estimated gas distribution due to mismatch between the gas position in a scene and the one in a monitor. In this paper, we propose a method for spatially visualizing gas distribution using augmented reality glasses. Furthermore, we discuss the initial step toward the adaptive visualization of gas distribution based on workers’ knowledge and monitoring purposes using real-time AR.

**Index Terms**—Gas distribution mapping, Gas visualization, Augmented reality, Head-Mounted display

## I. INTRODUCTION

Monitoring gas distribution is a way to supervise and validate the stabilization and safety of landfill sites. Recent advances in the visualization of gas distribution are being developed through the integration of monitors, cameras, GPS devices, and specific sensors. For example, an optical-based gas sensor can be used to measure methane gas, and this can be reconstructed and displayed in three-dimensional (3D) visualization [1]. Workers are required to observe detected gas visualized on monitors; however, this can confuse workers about the actual location of the gas in a real scene.

Augmented Reality (AR) can be used to convert gas distribution from specific sensors into a visualized form augmented in a real environment [2]. Although previous studies have been conducted in this regard, including the visualization of underground infrastructure [3], [4] and urban planning [5], studies on appropriate visualization techniques for workers in specific scenarios, such as landfill sites, have not been conducted. In this paper, we propose a model for exploring appropriate visualization techniques to represent gas distributions based on workers’ knowledge and monitoring purposes. This work is an initial step toward an adaptive visualization of gas distribution using AR glasses.

## II. ADAPTIVE GAS VISUALIZATION

### A. Measuring Device and Display Device

In our initial study, we apply our method with methane gas as similar as our previous study [1]. We used a gas detector to detect the gas distribution, and an AR Head-Mounted Display (AR-HMD) visualizes the gas in the near real-time (Fig. 1). A user wears an AR-HMD (Microsoft HoloLens) and holds a methane detector (Laser Methane mini SA3C32B-BJ, Tokyo Gas Engineering Solution), hereinafter referred to as LMm.

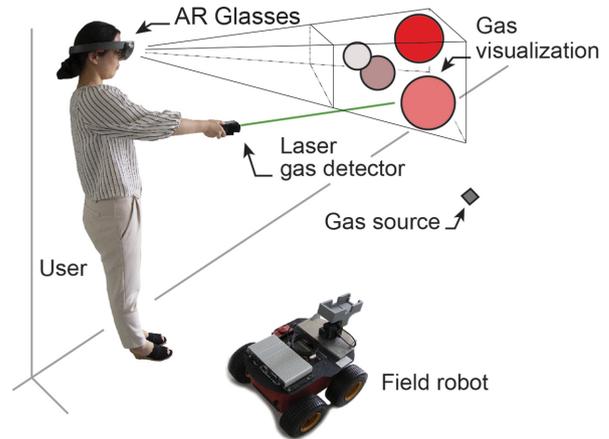


Fig. 1. Concept of our proposed gas visualization model: a user wears the AR glasses while using a gas detector. A detected gas information (e.g., gas concentration and location) are converted into graphics visualization displayed through the AR glasses.

The model measures the gas based on the location where a user points the LMm. Then, the gas distribution is calculated and mapped using visualization parameters before being displayed on the AR-HMD. In the case where the gas location cannot be directly reached by a user, the LMm is mounted on a field robot, and the robot sends information about the gas distribution to the user’s AR-HMD.

### B. Gas Measurement and Mapping Visualization

The parameter measured by the LMm is the gas column density, which is the sum of gas concentration per unit area integrated along the laser path. However, the gas concentration on each point is difficult to obtain directly from the LMm. Therefore, we divided the gas field detection area into 3D grids and mapped the gas density of each cell into grids before displaying the gas distribution of the entire field.

To visualize the gas distribution, we considered several characteristics of the gas, such as type, concentration, grid resolution, variance, and position. The type refers to the type of gas detected, i.e., the methane gas; the concentration refers to the volume of the gas or the density of the gas; the variance of the gas is the ability of the gas to spread based on the

